

-0		2.3 mi 3.7 km		Э—	2.1 mi 3.4 km	C	)——	1.0 mi 1.6 km	——(	)—	1.0 mi 1.6 km	— (	) ——	1.0 mi 1.6 km	— (	——C	4.4 mi 7.1 km	——(	)—	2.7 mi 4.3 km	—-C	/	2.0 mi 3.2 km	— C	)——(	
#1877 33-025-0106 Sec.23, T143	2-00-00 N, R96W		33-025-0 Sec.7, T	17437 00795-00-00 143N, R95W		#174 33-025-00 Sec.5, T14	796-00-00 3N, R95W		#17 33-025-00 Sec.4, T14	809-00-00 3N, R95W		33-025-0 Sec.3, T1-	3847 1074-00-00 43N, R95W		33-025-0 Sec.2, T1	20581 11338-00-00 143N, R95W		33-025-00 Sec.18, T1	765 857-00-00 44N, R94W		#211 33-025-014 Sec.10, T14	417-00-00 4N, R94W		#171 33-025-007 Sec.31, T145	751-00-00 5N, R93W	
KUBISCHTA K.B. = 2, Caliper	1-14-11H-14 376	43-96	SCO K.B. Caliper	TT 34-7H = 2,259		WITTINGE K.B. =	≟R 31-5H 2,289		TWIST K.B. = Caliper	31-4H 2,316	ELE	ANOR TWIS K.B. =	T 1-3-10H-143- = 2,374	95 HAI	K.B.	0M 1-2-11H-14 = 2,384	3-95X	FRI12 K.B. = Caliper	18-1H 2,344	SHE	Caliper	2,306	10H	KEVIN BEN K.B. = 2 Caliper	2,196	
	Resistivity .3 30		6 16 Gamma Ray 0 200	Resistivity 0.3 30		6 16 Gamma Ray 0 200	Resistivity 0.3 30		6 16 Gamma Ray 0 200	Resistivity 0.3 30		6 16 Gamma Ray 0 200	Resistivity 0.3 30		6 16 Gamma Ray 0 200	Resistivity	]	6 16 Gamma Ray 0 200	Resistivity 0.3 30		6 16 Gamma Ray 0 200	Resistivity 0.3 30		6 16 Gamma Ray 0 200	Resistivity 0.3 30	
	~					- AN	>		Marda	$\left  \right\rangle$	-	M.mon ha			WWW	4800		and the second se			000			M		
	NAL YOU		August Street			- Landa			T TWW			ANNAN IN						-			4 Access			AWWAR -		
Nr. Marriel	home I		Array 1	2000	- F	M-M			- Aller			Share and			- Maria			1 AN			5	${{{{{{{{{$		4800		
00	Amo		5				F		The second secon	5		million	200		han Somer	2000		Mayo	Z			- And		Mary		
	ž.		- Aller			- Aller									t	Ş				1-3	50			minn		
WAYNA A			and the second se	5200					P.panMid			Maria			Normal N		-	and and and a			- AND			2000		
	Enter and a second		Annual Contraction	- M		- And have	5		Andrew Party				22		www.ww	2200	-	Annual Contraction	ALW A					Aller Color		
M.M.	No.		MMM	J.W.	<u>&gt;</u>		7		M.V.M.	1					- Andrew - Al			- Wer			100 Miles			Monard		_
No. 1	North Car			8	2				- VNIV			MM			S.	1		And N	- E		M			200 E	Ħ	
00	Provine		Mar Mar	- Www		- AN				W.		Ann	25	TE	100 A	5400	3/	1 m			A second	12		130Mm	$\rightarrow$	
	Mar Marrie		MA	1		MM	MM		No.	- Maler		n N						ALL NO	1009C		The second secon	N.				_
	No.		June 1	00		N N			- Allowed and a second						1 Martin			William	MAL		Kara I		$\geq$	14-1 14-1 14-1 14-1 14-1 14-1 14-1 14-1	$\overline{\mathbf{z}}$	
				řen de la company							· · · · · · · · · · · · · · · · · · ·	2 Million	220		m Arr	2600		~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~							2	
58	Muha		NV Marian	- All All All All All All All All All Al		WWW.	- F		When			~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~			~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~			Chundy's						Contraction of the second seco		<b></b>
And And Mark	Y M		1				ž				-	North Mark	<u>}</u>		Morrison			Mundan M	- F		Jan Walker	5		5600	Ę	
1 No.	24		1 m			month	Ş		how they	N.W.	-	Lo Hi	280		And And And	5800 1111		handal	the Maria		2 Z	the second				
1101 Kyun	Mul		and March	Marthan		well have	- and -		Manho	Marine	-	Mahan	Mark		North Color	- And		Maria	- Aleston		M~~W	MV.r.		A Mary A	1 A A A A A A A A A A A A A A A A A A A	
What I	Mar Ala	DATUM	N N						WW W		-	Per Aller			North Mr.		-	Maria	₩.		and a	5		2800		
M R	2		Are			MA	$\leq$		R	Ş	1	The second			3	8000			J.			Ę		- And -	$\left  \frac{1}{2} \right $	
62						~~~~	$\square$		- Andrews	-	-	No.			and when the		1	and specialized			600			Madagenda		
24	2	_	1							3	4							-	12		5	- 2				

-0-	<u>2.8 mi</u> 4.5 km	O	0.2 mi 0.3 km	—0—	4.5 mi 7.2 km	—0—	2.3 mi 3.7 km	—0—	1.6 mi 2.6 km	O-	2.0 mi 3.2 km	—0—	1.5 mi 2.4 km	—0—	<u>1.0 mi</u> 1.6 km	O.	
#21461 33-025-01456-00-00 Sec.6, T144N, R96W N HECKER USA 41-6H # K.B. = 2,446 Caliper	¥2	#16573 33-025-00621-00-00 Sec.3, T144N, R96W KULISH 24-3H K.B. = 2,449 Caliper		#16425 33-025-00607-00-00 Sec.10, T144N, R96W SCHWINDT 31-10H K.B. = 2,470 Caliper		#16835 33-025-00675-00-00 Sec.25, T144N, R96W HOUGHTON 34-25H K.B. = 2,315 Caliper		#17448 33-025-00796-00-00 Sec.5, T143N, R95W WITTINGER 31-5H K.B. = 2,289 Caliper	E	#24926 33-025-02059-00 Sec.3, T143N, R LEANOR TWIST 2-3-' K.B. = 2,292 Caliper	95W 0H-143-95	#28241 33-025-02519-00-00 Sec.11, T143N, R95W REBSOM 5-14-23H-143-9! K.B. = 2,214 Caliper	5	#19206 33-025-01134-00-00 Sec.12, T143N, R95W NELSON 1-12-1H-143-95 K.B. = 2,260 Caliper		#20453 33-025-01311-0 Sec.7, T143N, F WALLACE 7- K.B. = 2,19 Caliper	-00-00 R94W 7-1H
16 amma Ray 200 0.3 30		Gamma Ray 0 200 0.3 30		6 16 Gamma Ray 0 200 0.3 30		Gamma Ray 0 200 8 0.3 30		6 16 Gamma Ray 0 200 0.3 30		6 16	istivity 30	Gamma Ray 0 200 0.3 30		6 16 Gamma Ray 0 200 0.3 30		6 16	Resistivity 3 30
Martha -		2200		5200													
5200 - 52				Comment		14 MM				2000 2000		4800		48		4800	
400				2400 V				5200			Z	M M		2000 P		0000	
G Contraction of the second		Marken Mark				SACON SACON				5200				A Constant		A manual second	A CONTRACT OF CONTRACT.
W W W		2000 2000		5600 5600			Σ	5400 5400	3	Mary Marine	Mr. And Market	and have been all		N/W/W		25200	
		A A A A A A A A A A A A A A A A A A A		MMMHP			5				- Man	A A A					- And Martin
	m								Munne					AN 100 100		2400	
				COOPE		Mallin Marken		800 MM/M/M/	- www.						~~~~~		
Mar Mar						Herry Warren		B A A A A A A A A A A A A A A A A A A A			2	26000					-
Murring mark	DATUM	6200		6200		Maril West, as - 1		5000		Mure Marine		MAL AND		1		28800	<u> </u>
And the second s				A CONTRACTOR		6200				6000 C	<u></u>			March Law Low			
6400		6420						6200				4000 (100) (1000 (		9000 Provide Alexandra		0009 W	

## Jeffrey W. Bader **Timothy O. Nesheim** Travis D. Stolldorf

Significant volumes (>1 million barrels/day) of co-produced water are generated daily during production operations for oil and gas in North Dakota. Most produced water is brine (saltwater), with very high concentrations of total dissolved solids. Produced water has historically been considered a waste in the oil and gas industry. Subsurface injection is the industry-preferred alternative for produced water disposal. Because produced water is brine, produced water disposal wells are referred to as salt water disposal wells (SWD

Geology of the area is the major factor in determining if injection is a viable option for produced water disposal. The Williston Basin of North Dakota has an ideal sequence of geologic units (Dakota Group) present at an optimal depth for produced water disposal. The lower Cretaceous Dakota Group consists of four formations in descending order (see Cross-Sections A-A' and B-B'):

Overlying the Dakota Group are several thousand feet of Cretaceous marine deposits including the Pierre Formation, a very thick, impermeable shale. The Jurassic Swift Formation uncomformably underlies the Dakota Group and consists of up to 625 ft (190 m) of marginal marine shale with interbedded limestone. The Dakota Group is approximately 700 ft (210 m) thick at depths of approximately 4,710-5,410 ft (1,440-1,650 m)

These Cretaceous and Jurassic units provide a complete succession of rocks for produced water injection. Of specific importance is the Inyan Kara Formation, which consists of sandstones and shales deposited in incised valleys along the coastline of the Cretaceous Western Interior Seaway. These valleys were cut by northnorthwesterly flowing rivers that drained into the seaway from highlands in southern North Dakota, Minnesota, and Canada. The valleys formed as the Cretaceous seaway regressed from North Dakota twice over a period of approximately 10 million years. The seaway transgressed back into the area forming estuaries, and sands were deposited in the valleys as sea-level rose, again in two transgressive events. Eventually the sea completely flooded all of North Dakota and the overlying marine units were deposited.

Inyan Kara sandstones deposited in these valleys are thick, porous (20-30% porosity), and permeable (Darcy level) enough to accept the injected water and the lateral continuity of the units allows for injected water to move into the formation (see Cross-Sections A-A' and B-B'), especially along valley trends. Although some lateral continuity is important, these units must have good seals above to protect shallow aquifers. The overlying Cretaceous shales provide such a seal and, along with the underlying Swift Formation, allow for excellent confining layers that will vertically contain injected brines within the Inyan Kara. The Inyan Kara is present only in the subsurface of the Williston Basin in North Dakota extending across most of the state. The formation ranges in thickness from approximately 230-480 ft (70-150 m) in the Killdeer 100K.

**ISOPACH OF INYAN KARA FORMATION SANDSTONES** 

This map presents thickness contours (isopachs) of interpreted injectable sandstone bodies present within the Inyan Kara Formation in the Killdeer 100K. The map and associated cross-sections were prepared in order to identify favorable areas where the potential for encountering sandstone bodies for injection of produced water is greater. Geographical features such as roads and cities are also presented to better aid in well placement. The map and cross-sections were prepared using wireline logs (gamma ray and resistivity) from 714 wells across the Killdeer 100K that were available for interpretation and assessment of sandstone thicknesses and lateral continuity. Valley trends (yellows), oriented to the north-northwest, can be identified on the map. In between these valleys in the interfluve areas (darker brown), sandstones are thinner, much less continuous, and have lower porosity and permeability than incised valley sandstones. Therefore, interfluve sandstones are less desirable for injection of produced water. Reservoir quality ranges using physical data (e.g., thickness, grain size) from each well are presented. Historic SWD well injection/pressure data from active and inactive SWD

**INYAN KARA SANDSTONE - ISOPACH INTERVALS (feet)** 


250	150
200	100

**CONTROL WELL TYPES/RESERVOIR OUALITY** 


Control points are included with contour lines and cross-sections to assist the user in evaluating general trends of potentially injectable sandstone bodies. Please note, lateral variability of sandstones can be very great with thickness changes of hundreds of feet in less than 1/2 mile. Therefore, this map should be used only to verify areas of greater sandstone thickness/trends rather than absolute values, especially away from control points. Wireline logs in the area should be accessed and evaluated prior to

Note: Text modified from Bader, J.W. and Nesheim T.O., 2016, Invan Kara Sandstone Isopach Map, Parshall 100K Sheet, North Dakota: North Dakota Geological Survey, Geologic Investigation No. 194.

2017

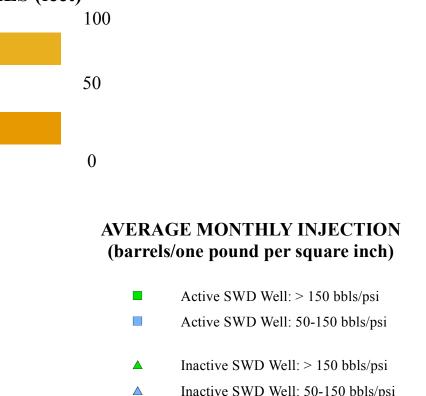

Inactive SWD Well: < 50 bbls/psi

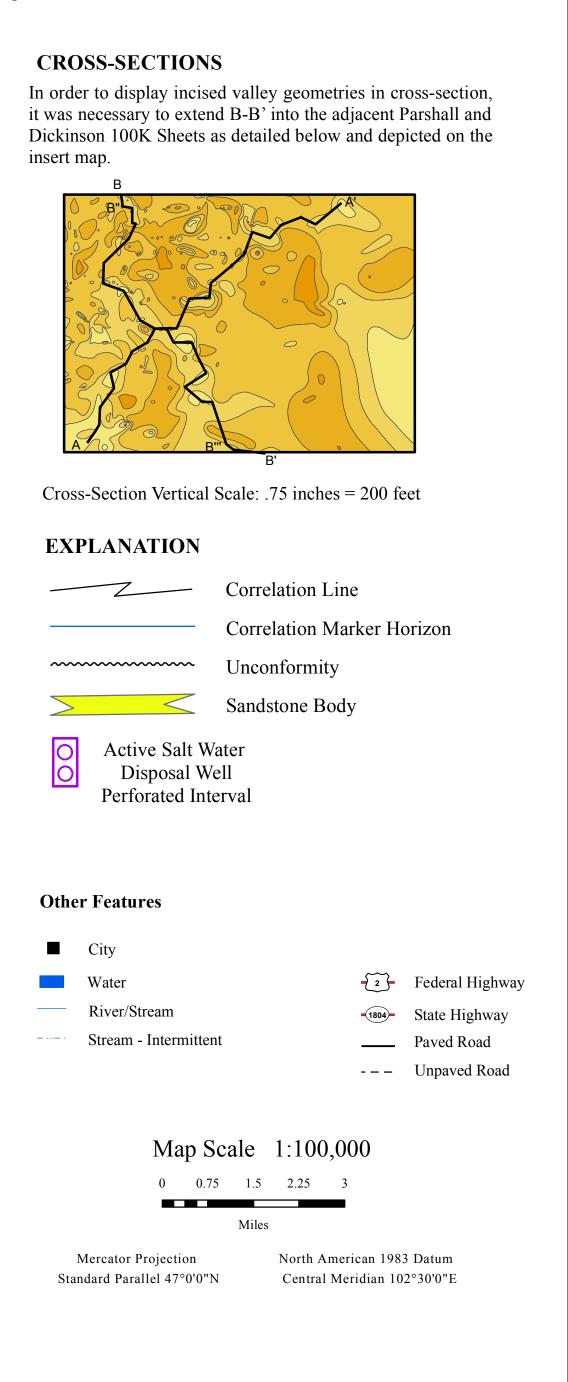

Cartographic Compilation: Navin Thapa Drafting: Ken Urlacher